


Model FBL 51H-P14

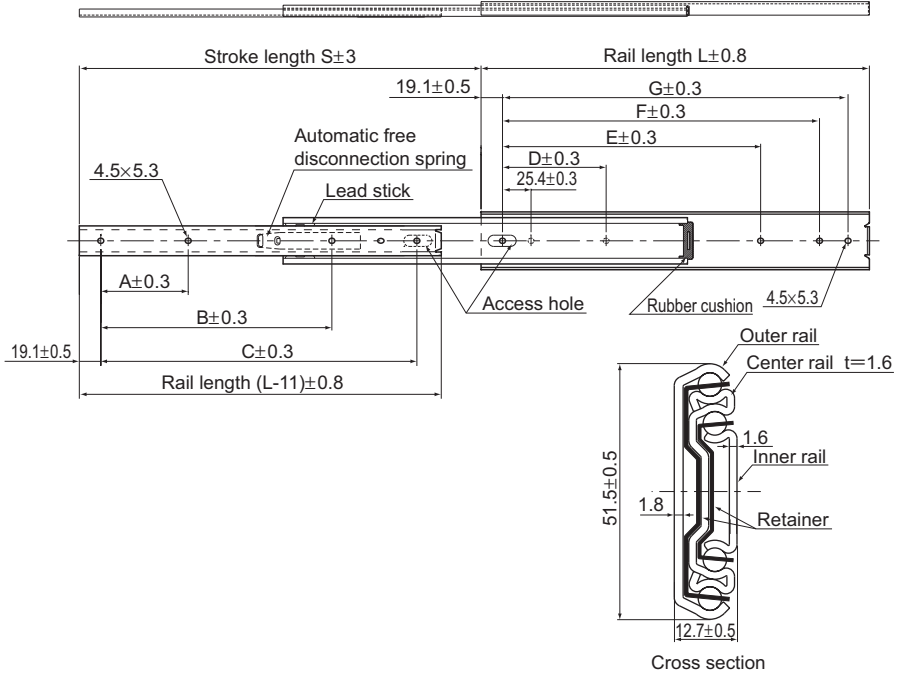

Unit: mm

| Rail length L (±0.8) | Stroke S (±3) | Mounting hole dimensions | | | | | | | Mounting hole | | Permissible load N/pair | Mass kg/pair |
|----------------------|---------------|--------------------------|-------|-------|-------|-------|-------|-------|---------------|------------|-------------------------|--------------|
| | | A | B | C | D | E | F | G | Inner rail | Outer rail | | |
| 305 | 330 | 76.2 | — | 254.0 | 76.2 | 190.5 | 241.3 | 266.7 | 3 | 6 | 850 | 1.46 |
| 356 | 381 | 127.0 | — | 304.8 | 88.9 | 215.9 | 292.1 | 317.5 | 3 | 6 | 820 | 1.72 |
| 406 | 432 | 152.4 | 317.5 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 4 | 6 | 770 | 1.89 |
| 457 | 483 | 177.8 | 368.3 | 406.4 | 127.0 | 292.1 | 393.7 | 419.1 | 4 | 6 | 730 | 2.26 |
| 508 | 533 | 152.4 | 419.1 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 4 | 6 | 710 | 2.52 |
| 559 | 584 | 177.8 | 469.9 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 4 | 6 | 690 | 2.72 |
| 610 | 635 | 177.8 | 520.7 | 558.8 | 177.8 | 393.7 | 546.1 | 571.5 | 4 | 6 | 660 | 3.00 |
| 660 | 686 | 203.2 | 571.5 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 4 | 6 | 630 | 3.25 |
| 711 | 737 | 228.6 | 622.3 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 4 | 6 | 610 | 3.54 |
| 762 | 787 | 228.6 | 673.1 | 711.2 | 228.6 | 469.9 | 698.5 | 723.9 | 4 | 6 | 580 | 3.86 |

Note) The permissible load and the mass each indicate the value for a pair of 2 units.

Model number coding

FBL51H-P14 +305L

Model number

Overall rail length (in mm)

Slide Rail